


CO₂ Component Description

Effective: April 1999

K-81-1080

Flex Hose - 1/2"

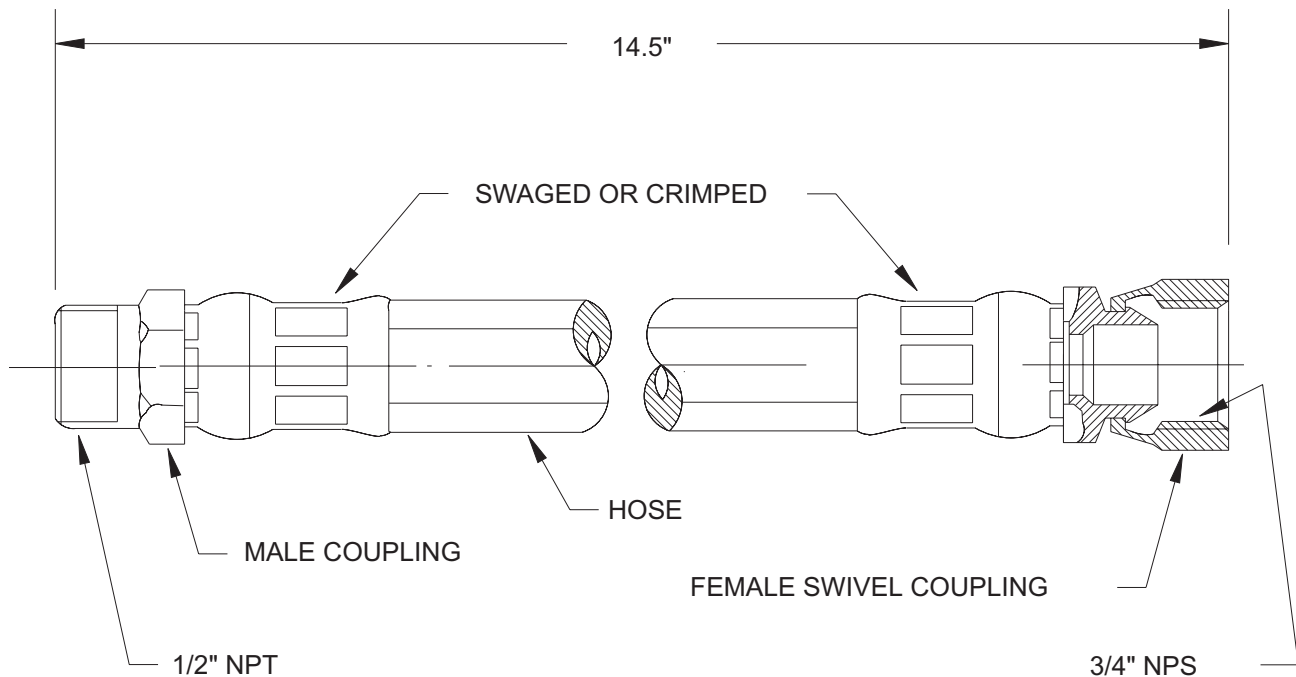

MINIMUM BURST PRESSURE: 6000 PSI (414 BAR)
HYDRO TEST PRESSURE: 1500 PSI (103 BAR)

TEMPERATURE RATING: -40F TO +250F (-40C TO 121C)

P/N: 252184

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.

If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. (508) 881-2000.

K-81-1080 4/99 ©1999 Kidde-Fenwal, Inc. Printed in U.S.A.

 **KIDDE**[®]
Fire Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508) 881-2000 FAX: (508) 881-8920

 **KIDDE**[®] Fire Systems