

# FM-200 Component Description

Effective: April 1999


Flex Hose - 3/4"

K-90-1090M

## Features

• See KIDDE Manual 90-FM200M-021 for USCG approval

• For use in marine applications only

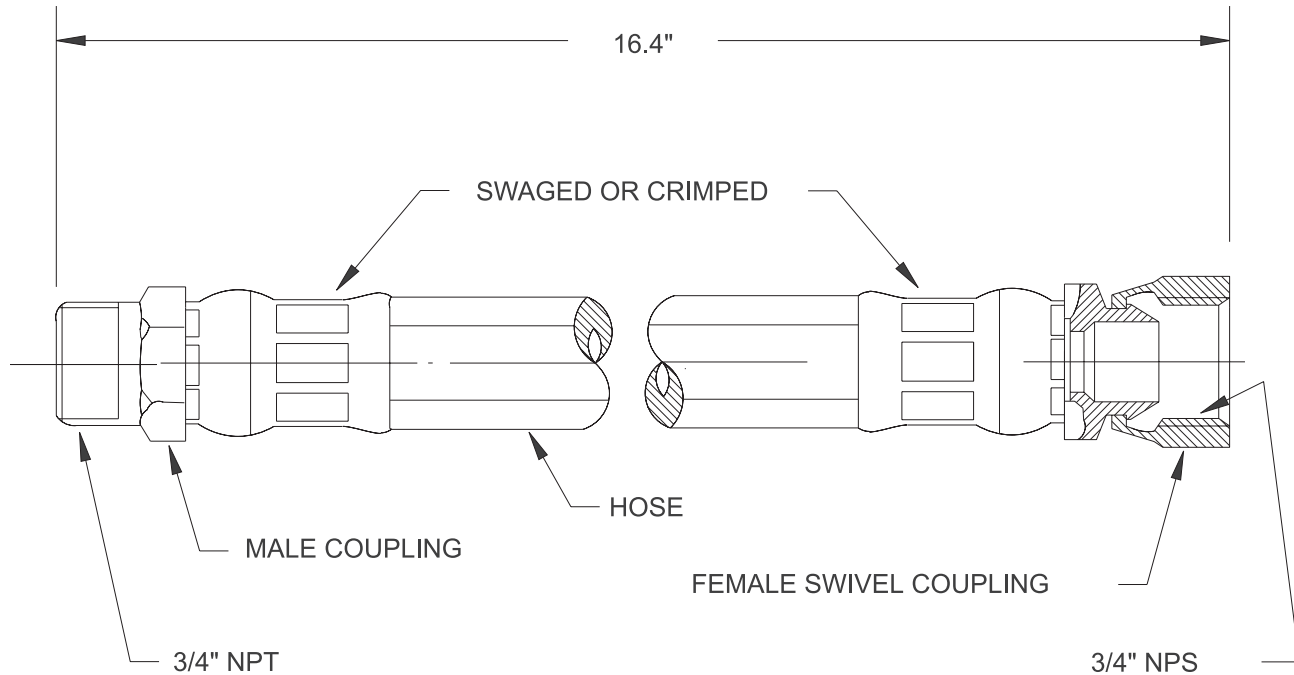

**MINIMUM BURST PRESSURE: 1100 PSI (758 BAR)**  
**HYDRO TEST PRESSURE: 4000PSI (276 BAR)**  
**TEMPERATURE RATING: -40F TO +200F (-40C TO +93C)**

P/N: 251821

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.

If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. (508) 881-2000.

K-90-1090M 4/99 ©1999 Kidde-Fenwal, Inc. Printed in U.S.A.

**KIDDE**  
**Fire Systems**

KIDDE-FENWAL, INC.  
400 MAIN STREET, ASHLAND, MA 01721  
TEL: (508) 881-2000 FAX: (508) 881-8920

**KIDDE** Fire Systems