

FM-200 Component Description


Effective: April 1999

K-90-5100

3/8" Check Valve

Features

• For use with UL listed, ULC listed & FMRC approved systems • See KIDDE Manual 90-FM200M-021 for USCG approval

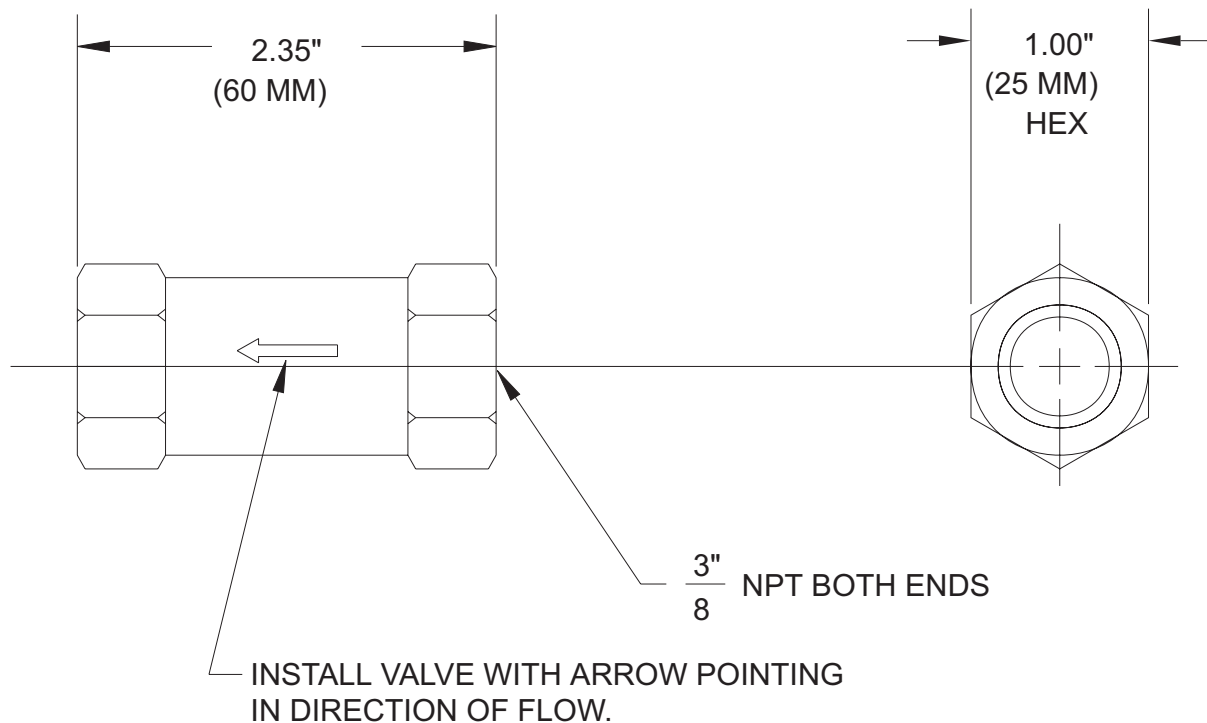

TECHNICAL DATA

WORKING PRESSURE: 0 TO 5000 PSI (0 TO 345 BAR)

PROOF PRESSURE: 10,000 PSI (690 BAR)

CRACKING PRESSURE: 2 TO 4 PSI (.14 TO .28 BAR)

OPERATING TEMPERATURE: -40F TO 250F (-40F TO 121C)

MATERIALS

BODY: BRASS

SEAL: BUNA-N

P/N: 261193

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.

If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. (508) 881-2000.

K-90-5100 4/99 ©1999 Kidde-Fenwal, Inc. Printed in U.S.A.

 **KIDDE**[®]
Fire Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508) 881-2000 FAX: (508) 881-8920