

FM-200 Component Description

Effective: April 1999


K-90-5200

Pressure Trip

Features

• For use with UL listed, ULC listed & FMRC approved systems

• See KIDDE Manual 90-FM200M-021 for USCG approval

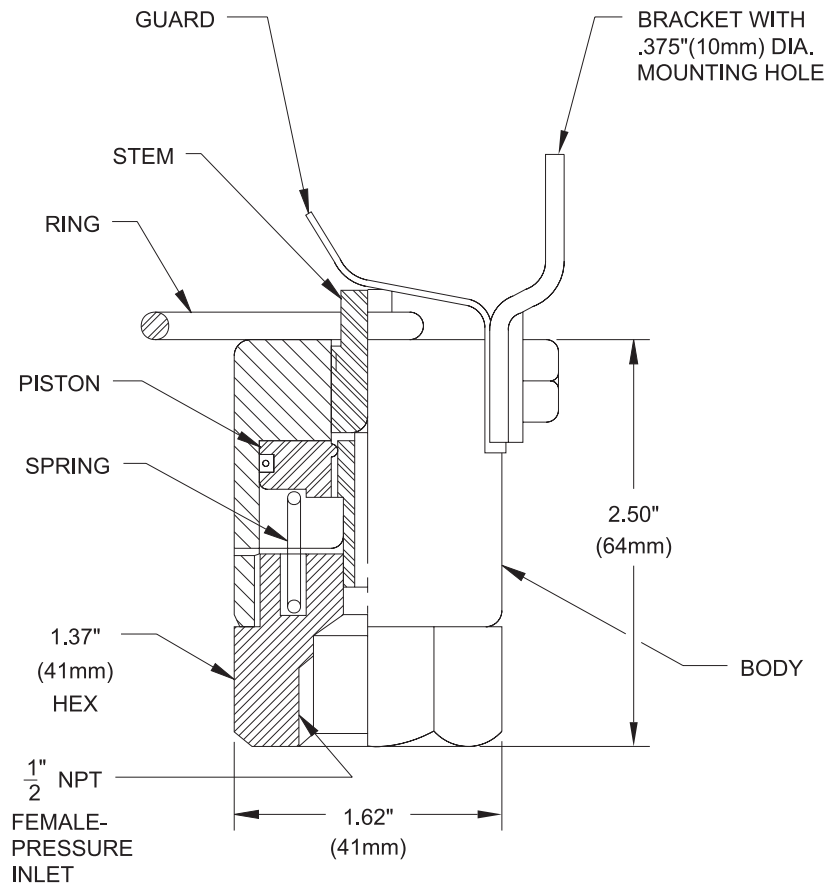

MATERIALS

BODY, BRACKET, AND PISTON: BRASS

**GUARD, STEM, RING AND SPRING: STAINLESS
STEEL**

MAXIMUM LOAD ON RING: 100 LBS. (45 KG)
**MINIMUM NOMINAL OPERATING PRESSURE:
50 PSI (3.5 BAR)**

P/N: 874220

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.

If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. (508) 881-2000.

K-90-5200 4/99 ©1999 Kidde-Fenwal, Inc. Printed in U.S.A.

 **KIDDE**[®]
Fire Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508) 881-2000 FAX: (508) 881-8920

 **KIDDE**[®] Fire Systems