


FE-13 Component Description

Effective: February 2000

Pressure Operated Explosion Proof Switch

K-96-3170

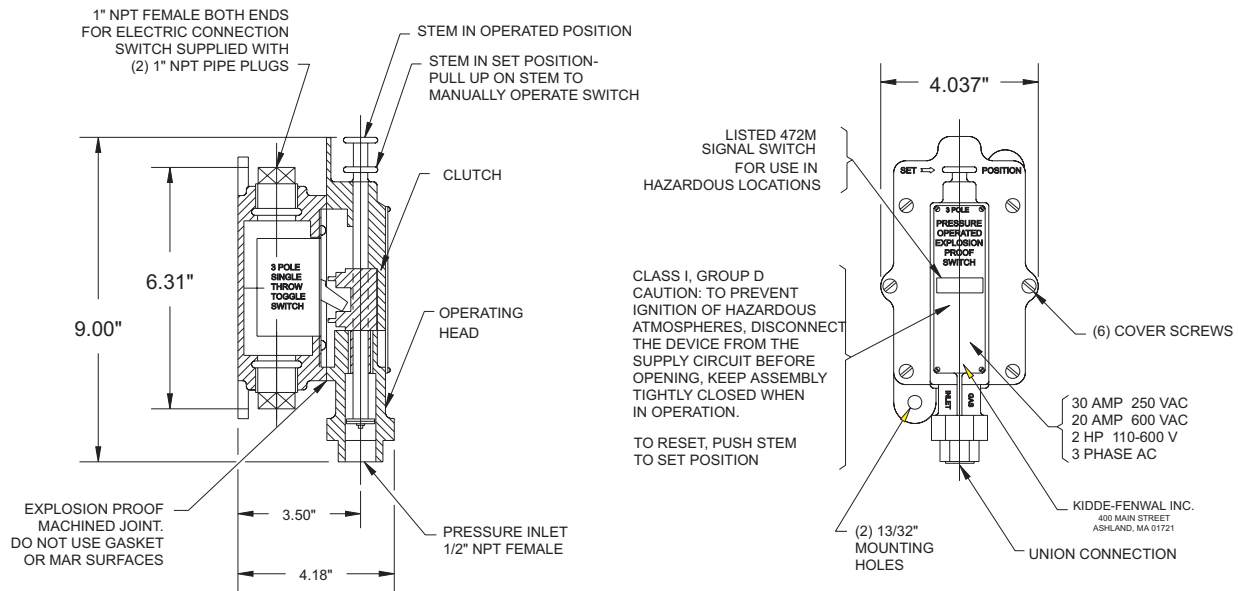

MATERIALS:

BASE: MALLEABLE IRON

OPERATING HEAD: CAST BRONZE

NOTES:

1. TOGGLE SWITCH MAY BE MOUNTED IN BASE FOR EITHER N.O. TO N.C. OR N.C. TO N.O. CONTACT TRANSFER UPON OPERATION. ILLUSTRATION SHOWS POSITION OF TOGGLE WHEN SWITCH IS IN SET POSITION.
2. ANY LOAD CONNECTED TO THE SWITCH MUST NOT EXCEED SWITCH RATING AND SHALL UTILIZE A SUITABLE PROTECTION DEVICE (I.E., CIRCUIT BREAKER, FUSE)
3. REMOVE OPERATING HEAD TO MAKE ELECTRICAL CONNECTIONS TO TOGGLE SWITCH. WHEN REPLACING OPERATING HEAD, ENSURE THAT TOGGLE ENGAGES CLUTCH. TIGHTEN COVER SCREWS SECURELY.

P/N: 981332

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.

If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. (508) 881-2000.

K-96-3170 2/00 ©2000 Kidde-Fenwal, Inc. Printed in U.S.A.

 **KIDDE**[®]
Fire Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508) 881-2000 FAX: (508) 881-8920